



This X-Polarized variable tilt antenna provides exceptional suppression of all upper sidelobes at all downtilt angles. It also features a wide downtilt range. This antenna is optimized for performance across the entire frequency band (1710-2170 MHz).

FEATURES / BENEFITS

- Variable electrical downtilt - provides enhanced precision in controlling intercell interference. The tilt is infield adjustable 2-12 deg.
- High Suppression of all Upper Sidelobes (Typically <-20dB).
- Optional remote tilt - can be retrofitted.
- Broadband design.
- Dual polarization.
- Low profile for low visual impact.



Technical features

ELECTRICAL SPECIFICATIONS

Frequency Range	MHz	1695-1900	1900-2200
Gain	dBi (dBd)	14.5 (12.4)	15.0 (12.9)
Horizontal Beamwidth	deg	68	63
Vertical Beamwidth	deg	15.3	13.6
Electrical Downtilt Range	deg	2-12	
1st Upper Sidelobe Suppression	dB	>18 all (Typically >20)	
Upper Sidelobe Suppression	dB	>18 all (Typically >20)	
Front-To-Back Ratio	dB	>28	
Polarization		Dual pol +/-45°	
VSWR		< 1.5:1	
Isolation between Ports	dB	>29	
3rd Order IMP @ 2 x 43 dBm	dBc	≥153	
Impedance	Ohms	50	
Maximum Power Input	W	300	
Beamwidth Approximate	deg	65	
Frequency/Operating Band		3G/UMTS (Single, Broad, Dual and Triple-Band) AWS Band (1695-1755, 2110-2200 MHz)	
Antenna Type		Dual Polarized	
Electrical Down Tilt Option		Variable	



MECHANICAL SPECIFICATIONS

Lightning Protection		Direct Ground
Connector Type/Location		(2) 7-16 Short Neck Female/Bottom
Dimensions - HxWxD	mm (in)	700 x 169 x 80 (27.5 x 6.65 x 3.15)
Weight w/o Mtg Hardware	kg (lb)	5.8 (12.8)
Weight w/ Mtg Hardware	kg (lb)	8.6 (19)
Survival/Rated Wind Speed	km/h (mph)	200 (125) / 160 (100)
Wind Load @ Rated Wind, Front	N (lbf)	210 (47)
Wind Load @ Rated Wind, Max.	N (lbf)	210 (47)
Wind Load @ Rated Wind, Side	N (lbf)	123 (27)
Wind Load @ Rated Wind, Rear	N (lbf)	102 (23)
Mount Type		Downtilt
Height (Approximate)	ft.	2.25

TESTING AND ENVIRONMENTAL


Operation temperature	°C (°F)	-40 to 60 (-40 to 140)
-----------------------	---------	-------------------------

MATERIAL


Radome Material/Color		Fiberglass/Light Grey RAL7035
Mounting Hardware Material		APM40-2
Radiating Element Material		Brass
Reflector Material		Aluminum

ORDERING INFORMATION


Shipping Weight	kg (lb)	11.8 (26)
Packing Dimensions, HxWxD	mm (in)	860 x 260 x 200 (33.8 x 10.2 x 7.8)
Mounting Hardware		APM40-2
Mounting Pipe Diameter	mm (in)	60 - 120 (2.36 - 4.72)
Mounting Hardware Weight	kg (lb)	3.4 (7.5)

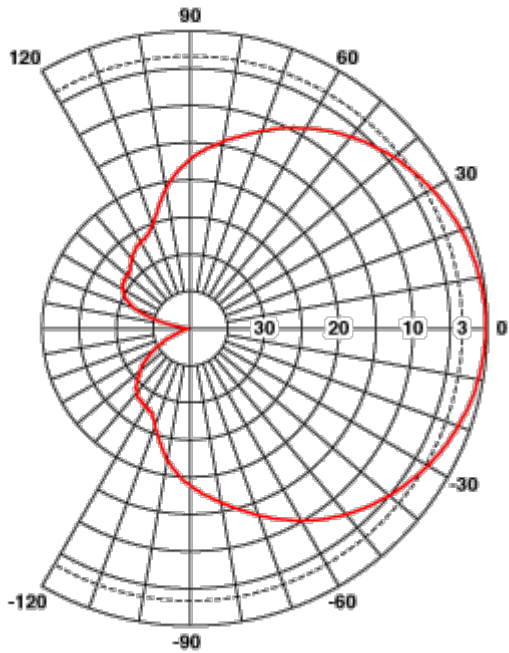

Horizontal Pattern

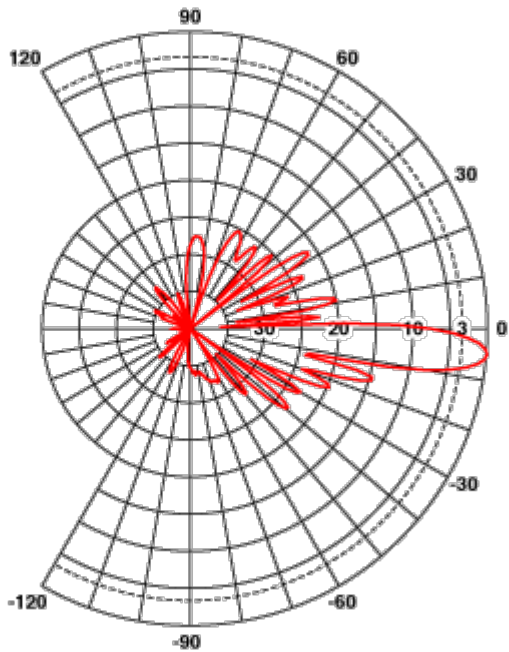

Vertical Pattern

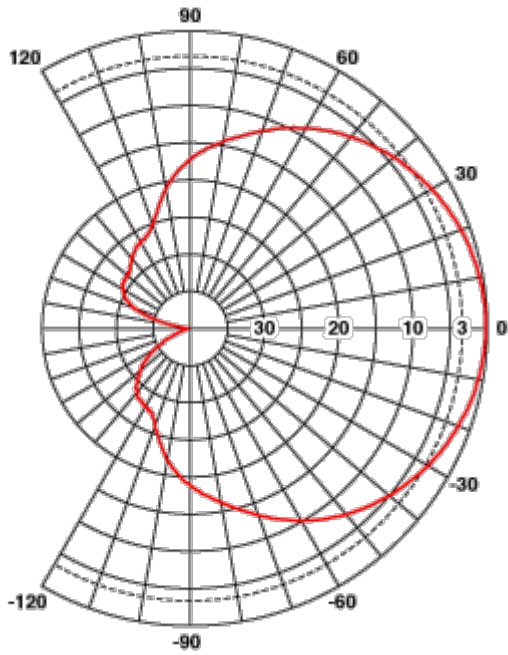

Horizontal Pattern

External Document Links

[APM40 Series Datasheet](#)

[APM40 Series Installation Instructions](#)

Notes

For additional mounting information please click "External Document Link" below.